Bi-fold Doors

Region B:

N2	Wind Classification
400Pa	Serviceability
1000Pa	Ultimate Strength
150Pa	Water Penetration

SIZES

Availability of sizes subject to wind load and water penetration requirements

Region C: Design wind pressure is calculated to 'AS/NZS 1170.2 Structural design actions – Wind action'

STUD OPENING	FRAME SIZE	2 LITE (FRAME SIZE 1600mm / STUD OPENING 1650mm)	3 LITE (FRAME SIZE 2400mm / STUD OPENING 2450mm)	4 LITE (FRAME SIZE 3200mm / STUD OPENING 3250mm)	5 LITE (FRAME SIZE 4000mm / STUD OPENING 4050mm)
2130mm	2100mm				
2430mm	2400mm				


220
202


321
312
330
303


440
431
422
413
404

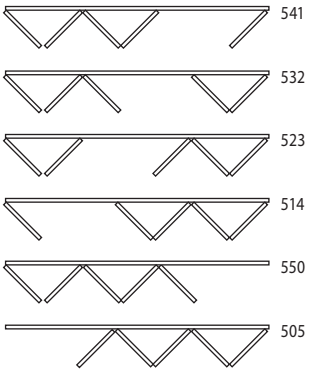
541
532
523
514
550
505

STUD OPENING	FRAME SIZE	6 LITE (FRAME SIZE 4800mm / STUD OPENING 4850mm)
2130mm	2100mm	
2430mm	2400mm	

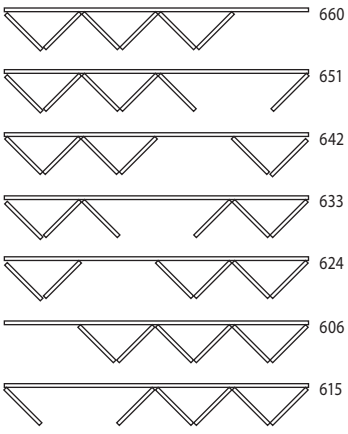
660
651
642
633
624
606
615

Bi-Fold Numbering

eg: **321** (View from left to right)

3	2	1
Total panels	No of panels opening to left	No of panels opening to right

Note: Bi-fold Doors may be subject to local variation or regulatory requirements